

# BLACKHAWK



Paver Special



Photos in this brochure show both standard and optional equipment.



# Blackhawk Paver Special

## 35 ton and 55 ton models

Load capacity - 35 tons in any 16'-0" of deck

Load capacity - 55 tons evenly distributed over entire deck

- 50 tons in any 16'-0" of deck

Shown with optional extension brackets and outrigger plants.



- 35 and 55 ton models.
- Accommodates most rollers and pavers.
- Gentle climb angle.
- Adjustable width front ramps.
- 35" of vertical gooseneck travel.
- Full width rear deck covered with 1 1/2" Apitong.



Optional self contained engine package.



The standard gooseneck has over 35' of vertical travel with the standard 84' radius. The optional 108' gooseneck radius shown here has over 42' of vertical travel.




Due to printing restrictions colors shown are representative only.

# Front Loading

Carry roller, paver and broom  
all in one load




- Hydraulic high lift (35' travel) non ground engaging gooseneck - wet line.
- Vertical gooseneck locking pin (air operated)
- Adjustable 5th wheel height (48" - 50" - 52" - 54").
- Hydraulic gooseneck support arm
- Main frame - 4 beam - 16' fully cambered
- 20' Crossmember spacing
- 22' deck height (adjustable - no blocks)
- 6' ground clearance (adjustable - no blocks)
- Adjustable width 4" front folding ramps (wood filled)
- Deck width - 8'-6" (102")
- 1 1/2' Apitong decking (full width)
- 3:1 sloped deck (18°) covered with 1 1/2' Apitong
- Air suspension,  $\pm 3'$  adjustable ride height
- Lash rings
- Two part urethane paint; standard colors black, red or yellow

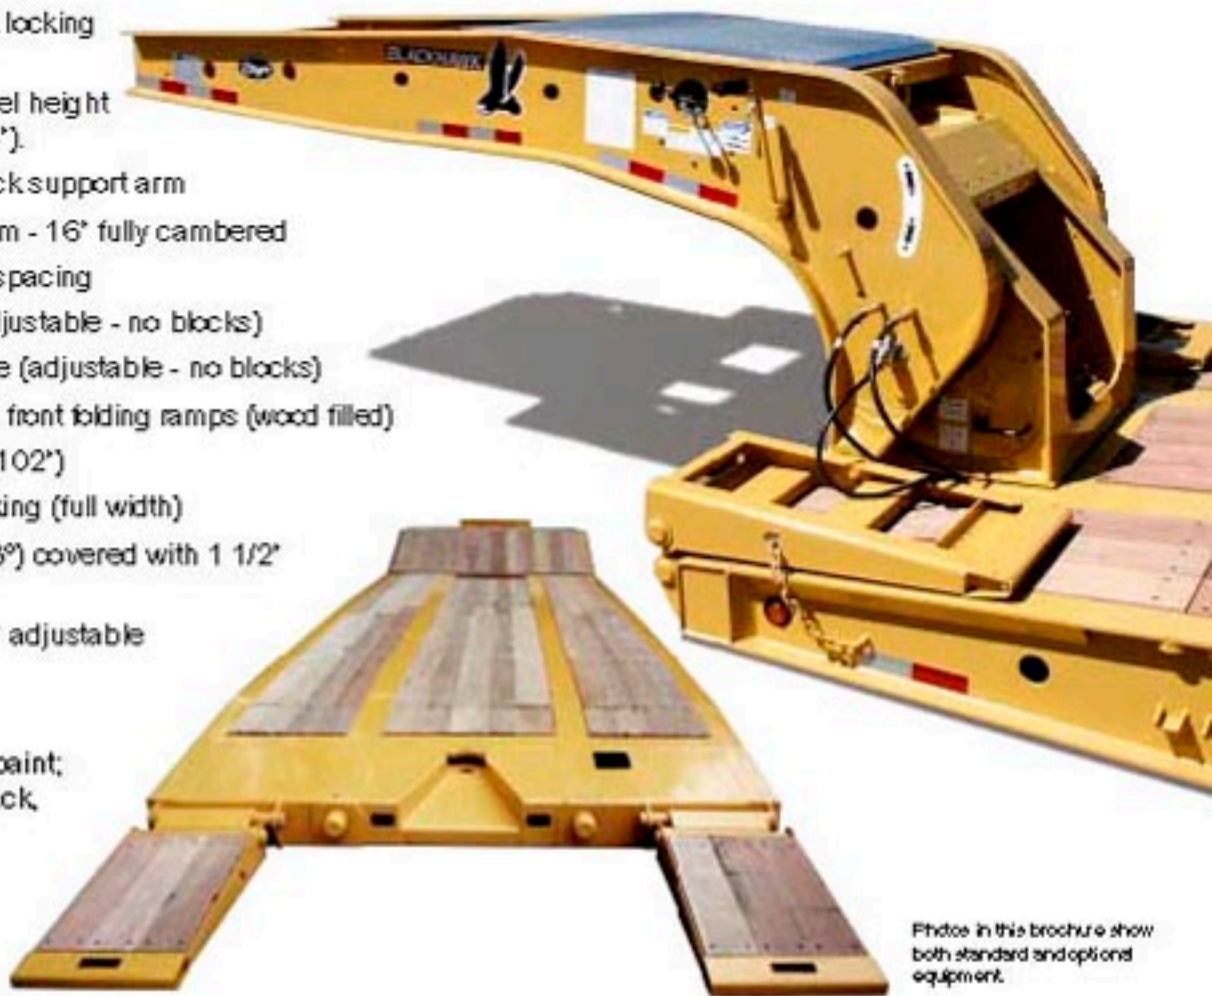

Photos in this brochure show both standard and optional equipment.



## Front Loading Model

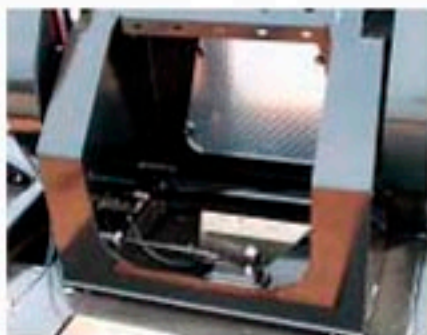

Air operated gooseneck lock pin.



Hydraulically operated gooseneck support arm and gravel guard.



Optional gooseneck light bar and full lockable rear cover.



Optional gooseneck storage area and optional gooseneck fenders.



Bolt-on 1/8" aluminum floor plate gooseneck cover.



Simple one hand adjustment of deck height and or fifth wheel settings. No doors, shims or spacers.



*E. D. Etnyre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Some items shown in photos and illustrations may be optional equipment.*

Distributed By:



**E. D. ETNYRE & CO.,**

1333 South Daysville Road, Oregon, Illinois 61061  
Phone: 800-995-2116 or 815/732-2116 • Fax 815-732-7400  
Web Site: [www.etnyre.com](http://www.etnyre.com) • Email: [sales@etnyre.com](mailto:sales@etnyre.com)  
ISO9001:2000 certified

Litho in U.S.A. L-PS-06